Unit #8

MIS 5214 Access Control




- Guest Speaker
- Access Control
- Identification and Authentication
 - Digital Identity Guidelines
 - Biometrics (quick overview/review)
- Centralized Remote Access Control Technologies

Access


The flow of information between a subject and an object

- Subject
 - Is an active entity that requests access to an object or the data within the object
 - Can be a user, program, or process
- Object
 - Can be a computer, computer directory, file, program, database or field within a table within a database

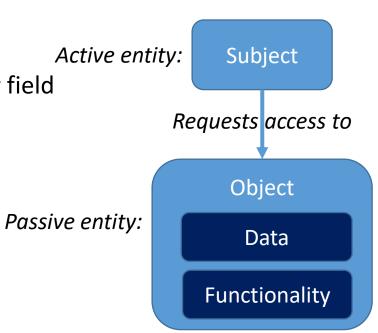


Access Controls

- Broad term covering several types of mechanisms that control access to features of networks, computers and information stored and flowing within them
- First line of defense in battling unauthorized access to network resources and systems
 - Give organizations ability to control, restrict, monitor and protect resource confidentiality, integrity and availability

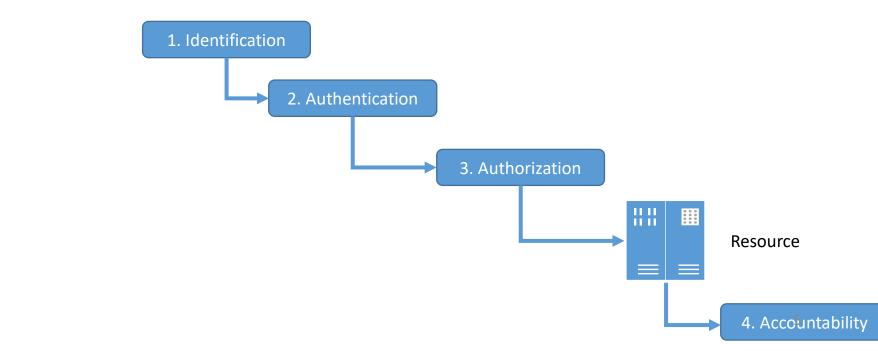


To access a network's resource, a user must:


• Prove their identity (i.e. has the necessary credentials)

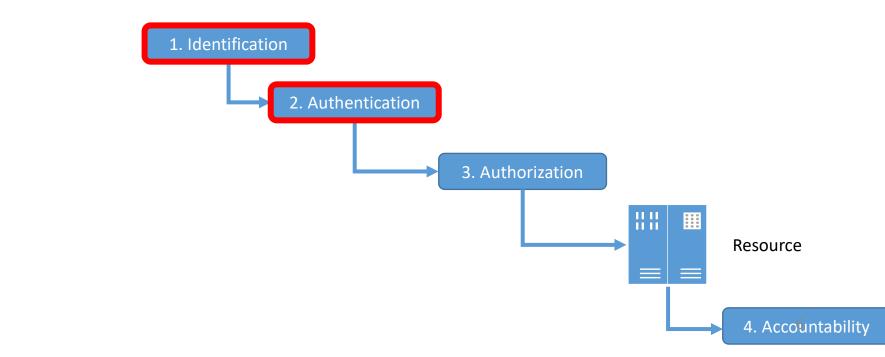


- Prove their identity (i.e. has the necessary credentials),
- Have been given privileges to access a resource and perform action they are requesting

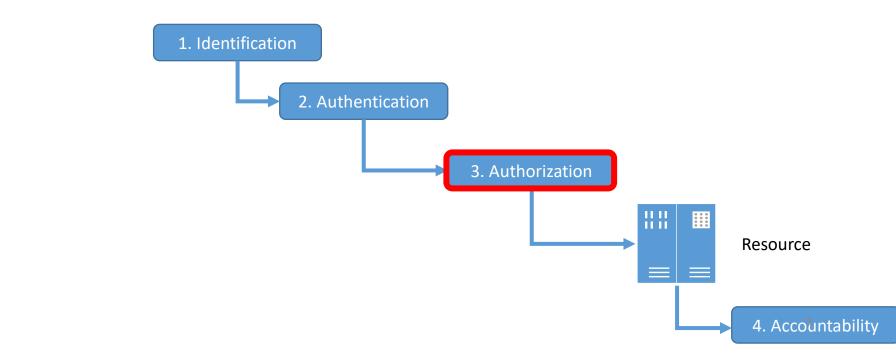

- Prove their identity (i.e. has the necessary credentials),
- Have been given privileges to access a resource and perform action they are requesting
- Be tracked to enforce accountability of their actions

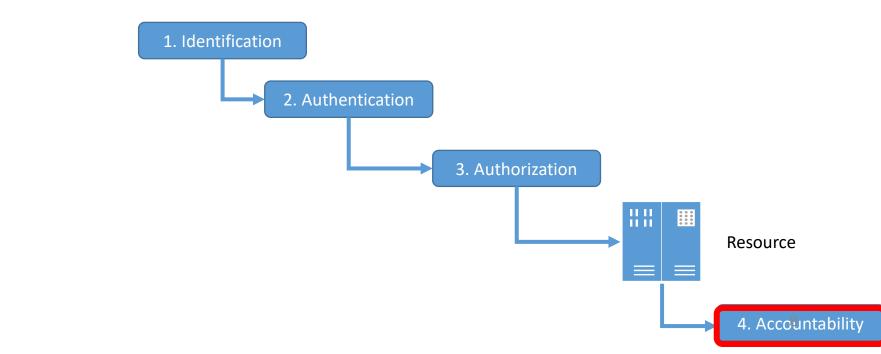

- Prove their identity (i.e. has the necessary credentials),
- Have been given privileges to perform action they are requesting
- Be tracked to enforce accountability of their actions

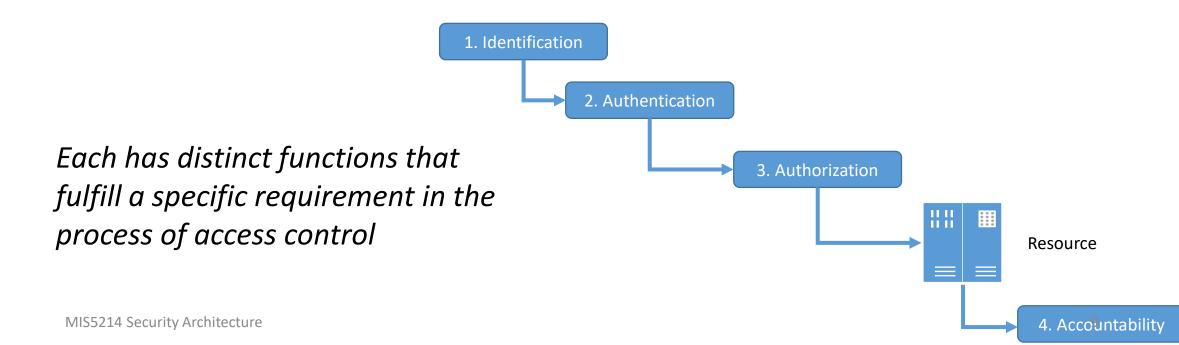

Logical Access Controls

- Are technical tools used for identification, authentication, authorization and accountability
 - "Logical" and "Technical" are synonyms that can be used interchangeably in this context
- Can be embedded in operating systems, applications, add-on security packages, databases and telecommunication management systems

Identification and Authentication

Usually involves a two-step process:

- 1. Identification: Entering public information
 - Method by which a subject (user, program or process) claims to have a specific identity
 - Username, employee number, account number, or email address
- 2. Authentication: Entering private information
 - Individual's identify must be verified during authentication process
 - Method by which subject proves it is who it says it is
 - Static password, smart authenticator ("token"), one-time password, or PIN

Identification

USER ID

User Identification

means

Identification: Entering public information

- Method by which a subject (user, program or process) supplies identifying information to claim they have a specific identity
 - Username, employee number, account number, or email address
- Creating secure identities involves 3 key aspects:
 - **1. Uniqueness** every user, program or process must be identified with an identifier (i.e. unique ID) that is specific to the individual for accountability
 - **2.** Non-descriptive Identifier should not indicate the purpose of the account nor the user's position nor tasks done with the account
 - **3.** Issuance provided by an authority as a formal/official means of proving identity



How should information systems be set up to mitigate risks to the CIA of their data content?

FIPS 199: Risk assessment based on security objectives and impact ratings

FIPS PUB 199

FEDERAL INFORMATION PROCESSING STANDARDS PUBLICATION

Standards for Security Categorization of Federal Information and Information Systems

Computer Security Division Information Technology Laboratory National Institute of Standards and Technology Gaithersburg, MD 20899-8900

February 2004



U.S. DEPARTMENT OF COMMERCE Donald L. Evans, Secretary TECHNOLOGY ADMINISTRATION

Phillip J. Bond, Under Secretary for Technology NATIONAL INSTITUTE OF STANDARDS AND TECHNOLOGY Arden L. Bement, Jr., Director

	POTENTIAL IMPACT		
Security Objective	LOW	MODERATE	HIGH
Confidentiality Preserving authorized restrictions on information access and disclosure, including means for protecting personal privacy and proprietary information. [44 U.S.C., SEC. 3542]	serving authorized disclosure of information could be expected to have a limited adverse effect on organizational operations, organizational assets, or individuals.		The unauthorized disclosure of information could be expected to have a severe or catastrophic adverse effect on organizational operations, organizational assets, or individuals.
<i>Integrity</i> Guarding against improper information modification or destruction, and includes ensuring information non- repudiation and authenticity. [44 U.S.C., SEC. 3542]	The unauthorized modification or destruction of information could be expected to have a limited adverse effect on organizational operations, organizational assets, or individuals.	The unauthorized modification or destruction of information could be expected to have a serious adverse effect on organizational operations, organizational assets, or individuals.	The unauthorized modification or destruction of information could be expected to have a severe or catastrophic adverse effect on organizational operations, organizational assets, or individuals.
<i>Availability</i> Ensuring timely and reliable access to and use of information. [44 U.S.C., SEC. 3542]	The disruption of access to or use of information or an information system could be expected to have a limited adverse effect on organizational operations, organizational assets, or individuals.	The disruption of access to or use of information or an information system could be expected to have a serious adverse effect on organizational operations, organizational assets, or individuals.	The disruption of access to or use of information or an information system could be expected to have a severe or catastrophic adverse effect on organizational operations, organizational assets, or individuals.

MIS5214 Security Architecture

NIST Special Publication 800-53 Reviews 4		Identification and Authentication					
Security and Privacy Controls for	IA-1	Identification and Authentication Policy and Procedures		P1	IA-1	IA-1	IA-1
Federal Information Systems and Organizations	IA-2	Identification and Authentication (Organizational Users)		P1	IA-2 (1) (12)	IA-2 (1) (2) (3) (8) (11) (12)	IA-2 (1) (2) (3) (4) (8) (9) (11) (12)
	IA-3	Device Identification	n and Authentication	P1	Not Selected	IA-3	IA-3
This publication is available free of drame from: http://dx.doi.org/10.6028/NOT.5P.600-3014	IA-4	Identifier Manageme	ent	P1	IA-4	IA-4	IA-4
April 2013 NOLIDEL UPORTE A OF 11-2-2013	IA-5	Authenticator Mana	gement	P1	IA-5 (1) (11)	IA-5 (1) (2) (3) (11)	IA-5 (1) (2) (3) (11)
	IA-6	Authenticator Feed	back	P2	IA-6	IA-6	IA-6
U.S. Department of Commerce	IA-7	Cryptographic Modu	ule Authentication	P1	IA-7	IA-7	IA-7
Rebecos M. Blank, Acting Secretary National Institute of Standards and Technology Patrick D. Gallagher, Under Secretary of Commerce for Standards and Technology and Director	IA-8	Identification and Au Organizational User		P1	IA-8 (1) (2) (3) (4)	IA-8 (1) (2) (3) (4)	IA-8 (1) (2) (3) (4)
FAMILY		IDENTIFIER					
Risk Assessment		RA	NIST Special Publication 800-18 Revision 1 Guide for Deve	eloning Secu	rity		
Planning		PL	Plans for Federal Information Systems Marianne Swanson Joan Hash Technology Aminterion Pauline Bowen				
System and Services Acquisition		SA					
Certification, Accreditation, and Security Asse	Certification, Accreditation, and Security Assessments						
Personnel Security		PS	U.S. Department of Commerce				
Physical and Environmental Protection		PE					
Contingency Planning	СР	INFORMATION SECURITY					
Configuration Management		CM					

MA

SI

MP

IR

AT

IA

AC

AU

SC

CLASS Management

Management Management

Management

Operational

Operational

Operational

Operational

Operational

Operational

Operational

Operational

Operational

Technical

Technical

Technical

Technical

Maintenance

Media Protection

Incident Response

Access Control

Awareness and Training

Audit and Accountability

System and Information Integrity

Identification and Authentication

System and Communications Protection

Computer Security Division Information Technology Laboratory National Institute of Standards and Technology Gaithersburg, MD 20890-8930

February 2006



U.S. Department of Commerce Cario: M.Gutierrez, Secretary National Institute of Standards and Toolwool

National Institute of Standards and Technology William Joffrey, Director

FEDRAMP SYSTEM SECURITY PLAN (SSP) HIGH BASELINE TEMPLATE

Cloud Service Provider Name Information System Name Version #

Version Date



CONTROLLED UNCLASSIFIED INFORMATION

FEDRAMP S	STEM SECURITY PLAN (SSP) HIGH BASELINE TEMPLATE
CSP Name	Information System Name

Version <u>#.#</u>, Date

MA-3

MA-4

Maintenance Tools

Nonlocal Maintenance

13. MINIMUM SECURITY CONTROLS

Security controls must meet minimum security control baseline requirements. Upon categorizing a system as Low, Moderate, or High sensitivity in accordance with FIPS 199, the corresponding security control baseline standards apply. Some of the control baselines have enhanced controls which are indicated in parentheses.

Security controls that are representative of the sensitivity of Enter Information System Abbreviation are described in the sections that follow. Security controls that are designated as "Not Selected" or "Withdrawn by NIST" are not described unless they have additional FedRAMP controls. Guidance on how to describe the implemented standard can be found in NIST 800-53, Rev 4. Control enhancements are marked in parentheses in the sensitivity columns.

Systems that are categorized as FIPS 199 Low use the controls designated as Low, systems categorized as FIPS 199 Moderate use the controls designated as Moderate and systems categorized as FIPS 199 High use the controls designated as High. A summary of which security standards pertain to which sensitivity level is found in Table 13-1 Summary of Required Security Controls that follows.

Table 13-1. Summary of Required Security Controls

ID	Control Description	Sensitivity Level			
UD.	Control Description	Low	Moderate	High	
AC	Access Control				
AC-1	Access Control Policy and Procedures	AC-1	AC-1	AC-1	
AC-2	Account Management	AC-2	AC-2 (1) (2) (3) (4) (5) (7) (9) (10) (12)	AC-2 (1) (2) (3) (4) (5) (7) (9) (10) (11) (12) (13)	
AC-3	Access Enforcement	AC-3	AC-3	AC-3	
AC-4	Information Flow Enforcement	Not Selected	AC-4 (21)	AC-4 (8) (21)	
AC-5	Separation of Duties	Not Selected	AC-5	AC-5	
AC-6	Least Privilege	Not Selected	AC-6 (1) (2) (5) (9) (10)	AC-6 (1) (2) (3) (5) (7) (8) (9) (10)	
AC-7	Unsuccessful Logon Attempts	AC-7	AC-7	AC-7 (2)	
AC-8	System Use Notification	AC-8	AC-8	AC-8	
AC-10	Concurrent Session Control	Not Selected	AC-10	AC-10	
AC-11	Session Lock	Not Selected	AC-11 (1)	AC-11 (1)	
AC-12	Session Termination	Not Selected	AC-12	AC-12 (1)	
AC-14	Permitted Actions Without Identification or Authentication	AC-14	AC-14	AC-14	
AC-17	Remote Access	AC-17	AC-17 (1) (2) (3) (4) (9)	AC-17 (1) (2) (3) (4) (9)	
AC-18	Wireless Access	AC-18	AC-18 (1)	AC-18 (1) (3) (4) (5)	
AC-19	Access Control For Mobile Devices	AC-19	AC-19 (5)	AC-19 (5)	
AC-20	Use of External Information Systems	AC-20	AC-20 (1) (2)	AC-20 (1) (2)	
AC-21	Information Sharing	Not Selected	AC-21	AC-21	
AC-22	Publicly Accessible Content	AC-22	AC-22	AC-22	
AT	Awareness and Training				
AT-1	Security Awareness and Training Policy and Procedures	AT-1	AT-1	AT-1	

Sensitivity Level ID Control Description Low Moderate High *FedRAMP does not include CM-7 (4) in the Moderate Baseline. NIST supplemental guidance states that CM-7 (4) is not required if (5) is implemented. СР Contingency Planning CP-1 Contingency Planning Policy and CP-1 CP-1 CP-1 Procedures CP-2 Contingency Plan CP-2 CP-2 (1) (2) (3) (8) CP-2 (1) (2) (3) (4) (5) (8) CP-3 CP-3 Contingency Training CP-3 CP-3 (1) CP-4 CP-4 Contingency Plan Testing CP-4 (1) CP-4 (1) (2) CP-6 Alternate Storage Site Not Selected CP-6 (1) (3) CP-6 (1) (2) (3) CP-7 Alternate Processing Site Not Selected CP-7 (1) (2) (3) CP-7 (1) (2) (3) (4) CP-8 Telecommunications Services Not Selected CP-8 (1) (2) CP-8 (1) (2) (3) (4) CP-9 Information System Backup CP-9 CP-9 (1) (3) CP-9 (1) (2) (3) (5) CP-10 Information System Recovery and CP-10 CP-10 (2) CP-10 (2) (4) Reconstitution IA Identification and Authentication IA-1 Identification and Authentication IA-1 IA-1 IA-1 Policy and Procedures IA-2 Identification and Authentication IA-2 (1) (12) IA-2 (1) (2) (3) (5) (8) IA-2 (1) (2) (3) (4) (5) (8) (Organizational Users) (11) (12) (9) (11) (12) IA-3 Device Identification and Not Selected IA-3 IA-3 Authentication IA-4 IA-4 Identifier Management IA-4 (4) IA-4 (4) IA-5 Authenticator Management IA-5 (1) (11) IA-5 (1) (2) (3) (4) (6) (7) IA-5 (1) (2) (3) (4) (6) (7) (8) (11) (13) (11)IA-6 Authenticator Feedback IA-6 IA-6 IA-6 IA-7 IA-7 IA-7 IA-7 Cryptographic Module Authentication IA-8 Identification and Authentication IA-8 (1) (2) (3) (4) IA-8 (1) (2) (3) (4) IA-8 (1) (2) (3) (4) (Non-Organizational Users) Incident Response IK IR-1 Incident Response Policy and IR-1 IR-1 IR-1 Procedures IR-2 Incident Response Training IR-2 IR-2 IR-2 (1) (2) IR-3 Incident Response Testing Not Selected IR-3 (2) IR-3 (2) IR-4 Incident Handling IR-4 IR-4 (1) IR-4 (1) (2) (3) (4) (6) (8) IR-5 Incident Monitoring IR-5 IR-5 IR-5 (1) IR-6 Incident Reporting IR-6 IR-6 (1) IR-6 (1) IR-7 Incident Response Assistance IR-7 IR-7 (1) (2) IR-7 (1) (2) IR-8 Incident Response Plan IR-8 IR-8 IR-8 IR-9 Information Spillage Response Not Selected IR-9 (1) (2) (3) (4) IR-9 (1) (2) (3) (4) MA Maintenance MA-1 System Maintenance Policy and MA-1 MA-1 MA-1 Procedures MA-2 (2) MA-2 Controlled Maintenance MA-2 MA-2

Not Selected

MA-4

MA-3 (1) (2) (3)

MA-4 (2)

MA-3 (1) (2) (3)

MA-4 (2) (3) (6)

Special Publication 800-53A Revision 4 Assessing Security and Privacy Controls in Federal Information Systems and Organizations — Building Effective Assessment Plans

NIST Special Publication 800-53A Revision 4	IA-2	IDENTI
Assessing Security and Privacy Controls in Federal Information		ASSES Detern users
Systems and Organizations		POTEN
Building Effective Assessment Plans		Exami
JOINT TASK FORCE TRANSFORMATION INITIATIVE		Intervi
This publication is available free of charge from: http://dx.doi.org/10.6026/NIST.SP.800-S3Ard		Test: [8 a c
December 2014	IA-2(1)	IDENTI
STWEAT OF CO.		ASSES Detern access
South States of Arts of Arts		POTEN Examin
U.S. Department of Commerce Penny Pritzker, Secretary		Intervi
National Institute of Standards and Technology Willie May, Acting Under Secretary of Commerce for Standards and Technology and Acting Director		Test: [8 C
	L	-1
	IA-2(2)	IDENTI
		ASSES
		Detern
		200011

2	IDENTIFICATION AND AUTHENTICATION (ORGANIZATIONAL USERS)
	ASSESSMENT OBJECTIVE:
	Determine if the information system uniquely identifies and authenticates organizational users (or processes acting on behalf of organizational users).
	POTENTIAL ASSESSMENT METHODS AND OBJECTS:
	Examine: [SELECT FROM: Identification and authentication policy; procedures addressing user identification and authentication; information system design documentation; information system configuration settings and associated documentation; information system audit records; list of information system accounts; other relevant documents or records].
	Interview: [SELECT FROM: Organizational personnel with information system operations responsibilities; organizational personnel with information security responsibilities; system/network administrators; organizational personnel with account management responsibilities; system developers].
	Test: [SELECT FROM: Organizational processes for uniquely identifying and authenticating users; automated mechanisms supporting and/or implementing identification and authentication capability].
2(1)	IDENTIFICATION AND AUTHENTICATION NETWORK ACCESS TO PRIVILEGED ACCOUNTS
	ASSESSMENT OBJECTIVE:
	Determine if the information system implements multifactor authentication for network access to privileged accounts.
	POTENTIAL ASSESSMENT METHODS AND OBJECTS:
	Examine: [SELECT FROM: Identification and authentication policy; procedures addressing user identification and authentication; information system design documentation; information system configuration settings and associated documentation; information system audit records; list of information system accounts; other relevant documents or records].
	Interview: [SELECT FROM: Organizational personnel with information system operations responsibilities; organizational personnel with account management responsibilities; organizational personnel with information security responsibilities; system/network administrators; system developers].
	Test : [SELECT FROM: Automated mechanisms supporting and/or implementing multifactor authentication capability].

IA-2(2)	IDENTIFICATION AND AUTHENTICATION NETWORK ACCESS TO NON-PRIVILEGED ACCOUNTS
	ASSESSMENT OBJECTIVE: Determine if the information system implements multifactor authentication for network access to non-privileged accounts.
	POTENTIAL ASSESSMENT METHODS AND OBJECTS: Examine: [SELECT FROM: Identification and authentication policy; procedures addressing user identification and authentication; information system design documentation; information system configuration settings and associated documentation; information system audit records; list of information system accounts; other relevant documents or records].
	Interview: [SELECT FROM: Organizational personnel with information system operations responsibilities; organizational personnel with account management responsibilities; organizational personnel with information security responsibilities; system/network administrators; system developers].
	Test : [SELECT FROM: Automated mechanisms supporting and/or implementing multifactor authentication capability].

How should information systems be set up to identify and authenticate users, programs, and processes to mitigate risks to the CIA of their data content?

NIST 800 63-3: Digital Identity Guidelines

Controls focus on 2 errors we seek to avoid:

- **1.** The impact of providing a service to the wrong subject
 - E.g. An attacker successfully identifies as someone else
- 2. The impact of excessive identity proofing
 - I.e. collecting and storing more information about a person than is required to successfully provide the digital service

NIST Special Publication 800-63-3 Digital Identity Guidelines Paul A. Grassi Michael E. Garcia James L. Fenton



Digital Identity Guidelines

Paul A. Grassi Michael E. Garcia James L. Fenton

This publication is available free of charge from: https://doi.org/10.6028/NIST.SP.800-63-3

Digital Identity Guidelines

6 Categories of impact resulting from providing a service to the wrong subject

- 1. Inconvenience, distress, or damage to standing or reputation
- 2. Financial loss or agency liability
- 3. Harm to agency programs or public interests
- 4. Unauthorized release of sensitive information
- 5. Personal safety
- 6. Civil or criminal violations

Identity and Authentication Controls are selected based on information security breach impact levels:

- 1. Low impact
- 2. Moderate impact
- 3. High impact

Impact-based determination of Identity and Authentication Assurance Levels

Table 6-1 Maximum Potential Impacts for Each Assurance Level			
Assurance Level			
Impact Categories	1	2	3
Inconvenience, distress or damage to standing or reputation	Low	Mod	High
Financial loss or agency liability	Low	Mod	High
Harm to agency programs or public interests	N/A	Low/Mod	High
Unauthorized release of sensitive information	N/A	Low/Mod	High
Personal Safety	N/A	Low	Mod/High
Civil or criminal violations	N/A	Low/Mod	High



✓ New schedule for today's classes and mid-term exam

✓Access Control

- Identification and Authentication
 - Digital Identity Guidelines
 - Biometrics (quick overview/review)
- Centralized Remote Access Control Technologies


Identity & Authentication Assurance Levels are defined as:

- 1. The degree of confidence in the vetting process used to establish the identity of the individual to whom the credential was issued
 - IAL Identity Assurance Level
- 2. The degree of confidence that the individual who uses the credential is the individual to whom the credential was issued
 - AAL Authentication Assurance Level



Digital Identity & Authentication Guidelines

- Specifies **3 kinds of identity authentication assurance controls to select in** mitigating risks associated with impacts resulting from identity and authentication errors in electronic transactions:
- 1. Enrollment and Identity Proofing
 - Protecting against: A false claim to an identity
- 2. Authentication and Lifecycle Management
 - Protecting against: A false use of a credential
- 3. Federation and Assertions
 - A false or compromised identity passed among a collection of systems
 - NIST SP 800-63C

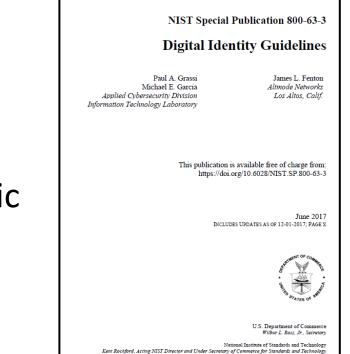

E-Authentication Credentials

Verifiers use credentials to authenticate the Claimant's identity based on possession and control of the corresponding authenticator

- Paper credentials presented by subject in-person can be checked to verify that the physical holder of the credential is the subject, these include:
 - Passports, birth certificates, driver's licenses, employee identity cards...
- Verification of electronic credentials
 - The password database entries possessed by the Verifier are considered to be the credentials
 - Public key certificates (X.509) are a classic example of credentials the Claimant can possess
 - To authenticate a Claimant using an electronic credential, the Verifier validates the credential and assures it was issued by an authorized Credential Service Provider and has not expired or been revoked by
 - 1. Determining if the credential has been signed by the Credential Service Provider
 - 2. Interactively querying the Credential Service Provider through a secure protocol



NIST Special Publication 800-63A

Digital Identity Guidelines

Enrollment and Identity Proofing

Paul A. Grassi Applied Cybersecurity Division Information Technology Laboratory

Privacy Authors: Naomi B. Lefkovitz Applied Cybersecurity Division Information Technology Laboratory

Jamie M. Danker National Protection and Programs Directorate Department of Homeland Security

nuclei orate Mary F. Theofanos nurity Office of Data and Informatics Material Measurement Laboratory This publication is available free of charge from: https://doi.org/10.6028/NIST.SP.800-63a

June 2017 INCLUDES UPDATES AS OF 12-01-2017; PAGE VII



James L. Fenton

Altmode Networks

Usability Authors:

Yee-Yin Choong

Kristen K. Greene


Information Access Division

Information Technology Laboratory

Los Altos, Calif.

U.S. Department of Commerce Wilbur L. Ross, Jr., Secretary

National Institute of Standards and Technology Kent Rochford, Acting NIST Director and Under Secretary of Commerce for Standards and Technology

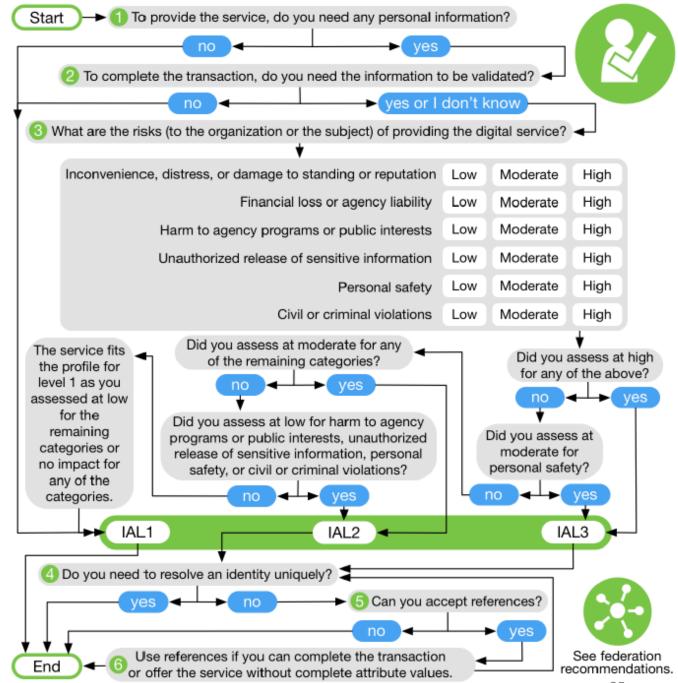

MIS5214 Security Architecture

Identity Assurance


IAL1: At IAL1, attributes, if any, are self-asserted or should be treated as self-asserted.

IAL2: At IAL2, either remote or in-person identity proofing is required. IAL2 requires identifying attributes to have been verified in person or remotely using, at a minimum, the procedures given in <u>SP 800-63A</u>.

IAL3: At IAL3, in-person identity proofing is required. Identifying attributes must be verified by an authorized CSP representative through examination of physical documentation as described in <u>SP 800-63A</u>.

Requirement	IAL1	IAL2	IAL3
Presence	No	In-person and unsupervised	In-person and supervised
Flesence	Requirements	remote.	remote.
Resolution	No Requirements	 The minimum attributes necessary to accomplish identity resolution. KBV may be used for added confidence. 	Same as IAL2

Authentication Assurance

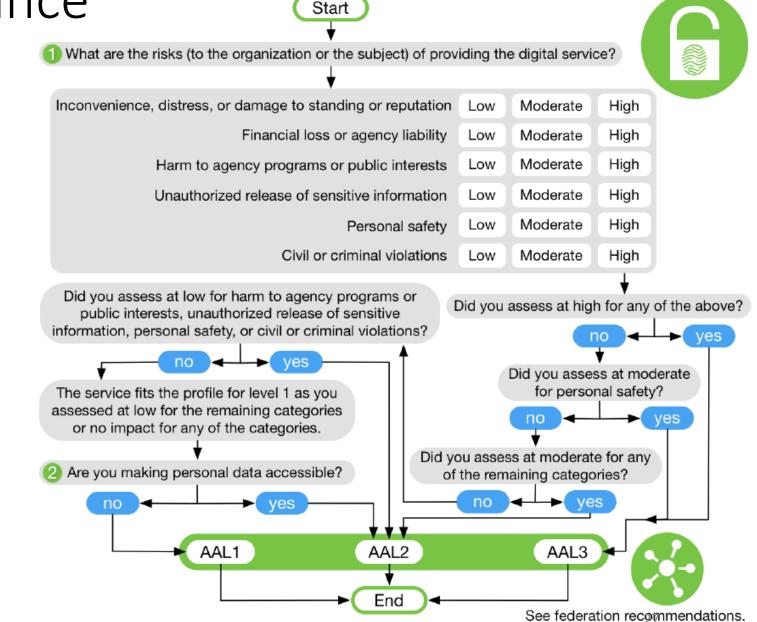

NIST Special Publication 800-63B

Digital Identity Guidelines

Authentication and Lifecycle Management

Paul A. Grassi Elaine M. Newton Applied Cybersecurity Division Information Technology Laboratory

> James L. Fenton Altmode Networks Los Altos, Calif.

Privacy Authors: Naomi B. Lefkovitz Applied Cybersecurity Division Information Technology Laboratory

Jamie M. Danker National Protection and Programs Directorate Department of Homeland Security

> This publication is available free of charge from: https://doi.org/10.6028/NIST.SP.800-63b

> > June 2017 INCLUDES UPDATES AS OF 12-01-2017; PAGE VI



Rav A. Periner

William E. Burr

Justin P. Richer Bespoke Engineering Billerica, Mass.

Silver Spring, Md.

Usability Authors:

Yee-Yin Choong

Kristen K. Greene

Mary F. Theofanos

Information Access Division

Office of Data and Informatics

Material Measurement Laboratory

Information Technology Laboratory

Andrew R. Regenscheid Computer Security Division

Dakota Consulting, Inc.

Information Technology Laboratory

U.S. Department of Commerce Wilbur L. Ross, Jr., Secretary

National Institute of Standards and Technology Kent Rochford, Acting NIST Director and Under Secretary of Commerce for Standards and Technology

MIS5214 Security Architecture

Authenticator Assurance

Authenticator Assurance Level

AAL1: AAL1 provides some assurance that the claimant controls an authenticator registered to the subscriber. AAL1 requires single-factor authentication using a wide range of available authentication technologies. Successful authentication requires that the claimant prove possession and control of the authenticator(s) through a secure authentication protocol.

AAL2: AAL2 provides high confidence that the claimant controls authenticator(s) registered to the subscriber. Proof of possession and control of two different authentication factors is required through a secure authentication protocol. Approved cryptographic techniques are required at AAL2 and above.

AAL3: AAL3 provides very high confidence that the claimant controls authenticator(s) registered to the subscriber. Authentication at AAL3 is based on proof of possession of a key through a cryptographic protocol. AAL3 is like AAL2 but also requires a "hard" cryptographic authenticator that provides verifier impersonation resistance.


Each assurance level describes the degree of certainty that the user has presented an identifier that refers to his or her identity

Assurance is defined as:

- 1. The degree of confidence in the vetting process used to establish the identity of the individual to whom the credential was issued
- 2. The degree of confidence that the individual who uses the credential is the individual to whom the credential was issued


Identity Assurance levels:

- **1.** Level 1: Little or no confidence in the asserted identity's validity
- 2. Level 2: High confidence in the asserted identity's validity
- **3.** Level **3**: Very high confidence in the asserted identity's validity

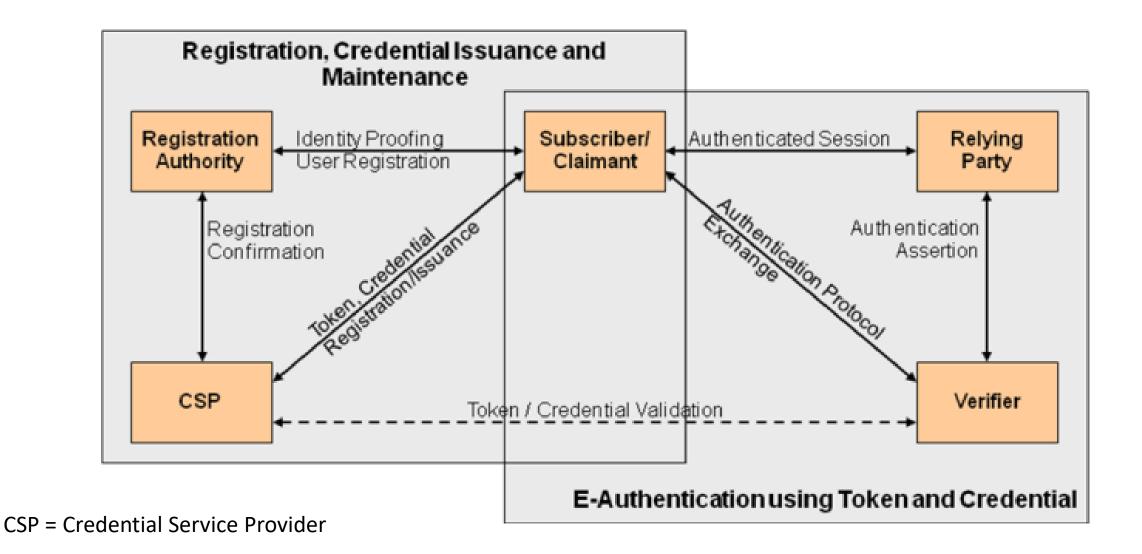

MIS5214 Securi Figuretule- The NIST SP 800-63-1 E-Authentication Architectural Model

Identity Assurance

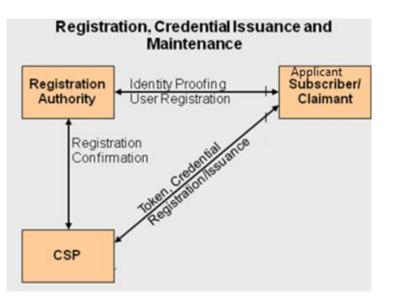

	Assurance Level			
Impact Categories	1	2	3	
Inconvenience, distress or damage to standing or reputation	Low	Mod	High	
Financial loss or agency liability	Low	Mod	High	
Harm to agency programs or public interests	N/A	Low/Mod	High	
Unauthorized release of sensitive information	N/A	Low/Mod	High	
Personal Safety	N/A	Low	Mod/High	
Civil or criminal violations	N/A	Low/Mod	High	

Requirement	IAL1	IAL2	IAL3
Evidence	No identity evidence is collected.	 One piece of SUPERIOR or STRONG evidence depending on strength of original proof and validation occurs with issuing source, OR Two pieces of STRONG evidence, OR One piece of STRONG evidence plus two (2) pieces of FAIR evidence. 	 Two pieces of SUPERIOR evidence, OR One piece of SUPERIOR evidence and one piece of STRONG evidence depending on strength of original proof and validation occurs with issuing source, OR Two pieces of STRONG evidence plus one piece of FAIR evidence.
Validation	No validation	Each piece of evidence must be validated with a process that is able to achieve the same strength as the evidence presented.	Same as IAL2
Verification	No verification	Verified by a process that is able to achieve a strength of STRONG.	Verified by a process that is able to achieve a strength of SUPERIOR.
Address Confirmation	No requirements for address confirmation	Required. Enrollment code sent to any address of record. Notification sent by means different from enrollment code.	Required. Notification of proofing to postal address.
Biometric Collection	No	Optional	Mandatory
Security Controls	N/A	 <u>SP 800-53</u> Moderate Baseline (or equivalent federal or industry standard). 	 <u>SP 800-53</u> High Baseline (or equivalent federal or industry standard).

Authentication – Classic 3 factor paradigm

... for authentication systems

Subject provides information to prove it is who it says it is and authentication system verifies the identification information

- 1. Something the subject knows ("authentication by knowledge")
 - Examples: password, PIN, combination to a lock...
 - Usually least expensive method to implement
 - Vulnerability: Someone else may acquire this knowledge and gain unauthorized access to a resource
- 2. Something the subject has ("authentication by ownership")
 - Examples: Key, swipe card, access card, badge...
 - Common for accessing facilities, sensitive areas, and authenticate holder
 - Vulnerability: Can be lost or stolen and result in unauthorized access
- 3. Something the subject is ("authentication by characteristic")
 - Examples: Fingerprint, palm scan, retina scan...
 - Based on biometrics a way to identify the subject by a unique physical attribute
 - Vulnerability: Can be expensive, cumbersome/troubling to users and associated with false acceptance or rejection

Authentication


Multi-factor authentication refers to use of >1 factor

- * Something the subject knows ("authentication by knowledge")
- ⁺ Something the subject has
 - Something the subject is ("authentication by characteristic")

Authentication system strength determined by the number of factors incorporated into the systems

("authentication by ownership")

- 2 factor implementations considered stronger than those using 1 factor
- Systems that incorporate 3 factors are stronger than 2 factor systems

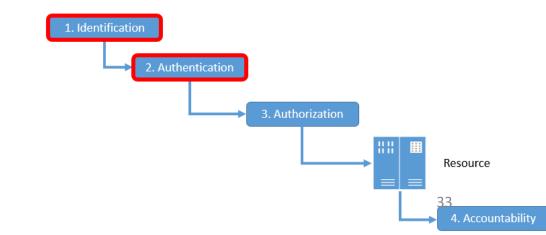

E-Authentication is slightly different from "classic" authentication

E-authenticators always contain a secret

• Used by the claimant to prove possession and control of the authenticator

Some of the classic authentication factors do not apply directly to e-authentication, for example:

- ID badge is "something you have" useful for authenticating to a human (e.g. a guard), but is not usually an authenticator for e-authentication
- Authentication factors classified as "something you know" are not necessary secrets
 - Knowledge based authentication where a claimant is prompted to answer questions that can be confirmed from public databases does not constitute an acceptable secret for e-authentication

E-Authentication, is slightly different from "classic" authentication

- Claimant authenticates to a system or application over a network by proving that he/she has possession and control of an authenticator registered with the Credential Service Provider for proving the bearer's identity
- The authenticator contains a <u>secret</u> the Claimant uses to prove that he/she is the Subscriber named in a particular credential
 - The authenticator uses the secret to generate an output ("token")
 ...used in the authentication process to demonstrate and prove the Claimant is the person
 to whom the authenticator was issued

E-Authentication Authenticators –

The secret contained in a is based on either public/private key pairs (asymmetric keys) or a shared authenticator secret (symmetric key)

Public Key authenticators - have the private key stored in the authenticator

A Verifier knowing the Claimant's public key through some credential (typically a public key certificate) can use an authentication protocol to verify the Claimant's identity, by proving that the Claimant has possession and control of the associated private key authenticator

- Shared Secret authenticators may be either symmetric keys or passwords
 - While often used in similar protocols, an important difference is how they related to the Subscriber
 - Symmetric keys are stored in hardware or software that the Subscriber controls
 - "Something the Subscriber has"
 - **<u>Passwords</u>** are memorized by the Subscriber
 - "Something the Subscriber knows"
 - More vulnerable to password guessing network attacks, keyboard logging, and being learned by someone watching the password being entered than practical for cryptographic keys
 - Also susceptible to keyboard logging

Either way - Subscriber has a duty to maintain exclusive control of his/her authenticator, since possession and control of the authenticator is used to authenticate the Claimant's identity

Assertions


- On completion of the authentication process, the Verifier generates an assertion containing the result of the authentication and provides it to the RP
- Examples of Assertions:
 - Cookies Character strings, placed in memory, which are available to websites within the same Internet domain as the server that placed them in the Web browsers. Cookies may be assertions or pointers to assertions
 - SAML (Security Assertion Markup Language) Assertions Specified using a mark-up language intended for describing security assertions. They can be used by a Verifier to make a statement to a RP about the identity of a Claimant, and may be digitally signed
 - Kerberos Tickets Allow a ticket granting authority to issue session keys to tow authenticated parties using symmetric key based encapsulation schemes

- 1. Memorized Secrets something you know
 - A secret shared between Subscriber and CSP
 - Typically character strings (e.g. passwords, passphrases,) or numerical strings (PINs)
 - Authenticator presented to the Verifier in an authentication process is the secret itself (e.g. password, passphrase, or PIN itself)



2. Look-up Secret – something you have

- The secret(s) identified by a prompt
- A physical or electronic authenticator that stores a set of secrets shared between the Claimant and the CSP
- Claimant uses the authenticator to look up the appropriate secret(s) needed to respond to a prompt from the Verifier (the authenticator input)
- E.g. Claimant asked by the Verifier to provide a specific subset of the numeric or character strings printed on a card in table format

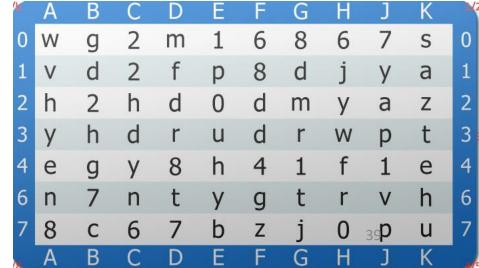

3. Out of Band authenticator

- Physical device uniquely addressable
- Receives a Verifier-selected secret sent to the Claimant's device for one-time use
- Is possessed and controlled by Claimant
 - Supports private communication over a channel that is separate from the primary channel for e-authentication
- Value provided by the Out of Band authenticator is presented to the Verifier using the primary channel for e-authentication

E.g. Claimant attempts to log into a website and receives a text message on his/her cellphone with a random authenticator to be presented as part of the electronic protocol



- 4. Single-factor (SF) One-Time Password (OTP) something you have
 - Authentication achieved via the one-time password
 - A hardware device that supports the spontaneous generation of one-time passwords
 - This device has an embedded secret that is used as the seed for generation of one-time passwords and does not require activation through a second factor
 - Authentication is accomplished by providing an acceptable one-time password and thereby proving possession and control of the device
 - E.g. the one-time password device may display 6 numbers at a time



- 5. Single-factor (SF) Cryptographic Device something you have
 - Authenticator is a signed message
 - Hardware device performs cryptographic operations on input provided to the device
 - Device uses embedded symmetric or asymmetric cryptographic keys
 - Authentication is accomplished by proving possession of the device
 - Device does not require activation through a second factor of authentication
 - E.g. Transport Layer Security (TLS) uses a "certificate verify" message
 - The server verifies the client's identity by verifying the client's digital certificate with the public key



MIS5214 Security Architecture





- 6. Multi-factor (MF) Cryptographic Software something you have (and either something you know or something you are)
 - Authenticator is a signed message
 - A cryptographic key is stored on disk or some other "soft" media and requires activation through a second factor of authentication
 - Authentication is accomplished by proving possession and control of the key
 - Device requires activation through a second factor of authentication either something you know or something you are (e.g. fingerprint)
 - E.g. Transport Layer Security (TLS) uses a "certificate verify" message
 - The server verifies the client's identity by verifying the client's digital certificate with the public key



- 8. Multi-factor (MF) One-Time Password (OTP) Device something you have (and either something you know or something you are)
 - Authenticator is the one-time password
 - A hardware device that generates one-time passwords for use in authentication and which requires activation through a second factor of authentication
 - Second factor of authentication may be achieved through an integrated
 - Keypad
 - Biometric reader (e.g. fingerprint)
 - Direct computer interface (e.g. USB port)
 - One-time password is typically displayed on the device and manually input to the Verifier as a password, although direct electronic input from the device to a computer is also allowed



- **9.** Multi-factor (MF) Cryptographic Device something you have (and either something you know or something you are)
 - Authenticator is some type of signed message
 - A hardware device that contains a protected cryptographic key that requires activation through a second authentication factor
 - Authentication accomplished by proving possession of the device and control of the key
 - May be activated by something you know or something you have

Authenticator Usage

An authentication process may involve a single authenticator, or a combination of two or more authenticators:

- **Single authenticator** Claimant presents a single authenticator to prove their identity to the Verifier
 - E.g. Claimant attempts to log into a password protected website, the Claimant enters a username and password
 - In this instance, only the password is considered to be an authenticator
- Multi-authenticator authentication Claimant presents values generated by two or more authenticator to prove his/her identity to the Verifier
 - The combination of authenticators is characterized by the combination of factors used by the authenticators (both inherent in the manifestation of the authenticators, and those used to activate the authenticators)
 - E.g. Verifier requires a Claimant to enter a password and use a single-factor cryptographic device is an example of a multi-authenticator authentication
 - The combination is considered multi-factor, since the password is *something you know* and the cryptographic device is *something you have*



AAL = Authenticator Assurance Level

AAL1 : = 1 Factor

AAL2 : = 2 Factors

AAL3 : = 2 Factors: Hardware-based authenticator and an authenticator that provides verifier impersonation resistance

Start				
O What are the risks (to the organization or the subject) of produce of the subject of product of the subject of the subje	viding th	e digital servi	ce?	
Inconvenience, distress, or damage to standing or reputation	Low	Moderate	High	
Financial loss or agency liability	Low	Moderate	High	
Harm to agency programs or public interests	Low	Moderate	High	
Unauthorized release of sensitive information	Low	Moderate	High	
Personal safety	Low	Moderate	High	
Civil or criminal violations	Low	Moderate	High	
2 Are you making personal data accessible?	you asse	Did you asse for perso ss at moderat haining catego AAL3	e for any rries?	→ yes
MIS5214 Security Architecture				

Requirement	AAL1	AAL2	AAL3
Permitted Authenticator Types	Memorized Secret; Look-Up Secret; Out-of-Band; SF OTP Device; MF OTP Device; SF Crypto Software; SF Crypto Device; MF Crypto Software; MF Crypto Device	MF OTP Device; MF Crypto Software; MF Crypto Device; or Memorized Secret plus: • Look-Up Secret • Out-of-Band • SF OTP Device • SF Crypto Software • SF Crypto Device	MF Crypto Device; SF Crypto Device plus Memorized Secret; SF OTP Device plus MF Crypto Device or Software; SF OTP Device plus SF Crypto Software plus Memorized Secret
FIPS 140 Verification	Level 1 (Government agency verifiers)	Level 1 (Government agency authenticators and verifiers)	Level 2 overall (MF authenticators) Level 1 overall (verifiers and SF Crypto Devices) Level 3 physical security (all authenticators)
Reauthentication	30 days	12 hours or 30 minutes inactivity; MAY use one authentication factor	12 hours or 15 minutes inactivity; SHALL use both authentication factors
Security Controls	SP 800-53 Low Baseline (or equivalent)	SP 800-53 Moderate Baseline (or equivalent)	<u>SP 800-53</u> High Baseline (or equivalent)
MitM Resistance	Required	Required	Required
Verifier- Impersonation Resistance	Not required	Not required	Required
Verifier- Compromise Resistance	Not required	Not required	Required
Replay Resistance	Not required	Not required	Required
Authentication Intent	Not required	Recommended	Required
Records Retention Policy	Required	Required	Required
Privacy Controls	Required	Required	Required 47

A "draft" attempt at summarizing use of Authenticators for Authentication Assurance Levels

	Samething Vau.	trou	hove	hove	hore	hove	Adrex Know of diel	hove	Porex Riou of ore	tone * Anow or ore
Something you		Memorized Secret	Look-up Secret	Out of Band Device	Single-Factor OTP Device	Single-Factor Cryptographic Software	Multi-Factor Cryptographic Software	Single-Factor Cryptographic Device	Multi-Factor OTP Device	Multi-Factor Cryptographic Device
know	Memorized Secret	AAL1	AAL2	AAL2	AAL2	AAL2	AAL2	AAL3	AAL3	AAL3
have	Look-up Secret		AAL1	AAL1	AAL1	AAL1	AAL2	AAL1	AAL3	AAL3
have	Out of Band Device			AAL1	AAL1	AAL1	AAL2	AAL1	AAL3	AAL3
have	Single-Factor OTP Device				AAL1	AAL1	AAL2	AAL1	AAL3	AAL3
have	Single-Factor Cryptographic Software					AAL1	AAL2	AAL1	AAL3	AAL3
have + (know or are)	Multi-Factor Cryptographic Software							AAL2	AAL3	AAL3
have	Single-Factor Cryptographic Device								AAL3	AAL3
have + (know or are)	Multi-Factor OTP Device									AAL3
<i>have + (know or are)</i> MIS5214 Securit	Multi-Factor Cryptographic Devicitecture									AAL3 48

Authenticator Threats

Something you have

- May be lost, damaged, stolen from the owner or cloned by the Attacker
 - E.g. Attacker who gains access to the owner's computer might copy a software authenticator
 - E.g. A hardware authenticator might be stolen, tampered with, or duplicated

Authenticator Threats

Something you know

- May be disclosed to an Attacker
- Attacker might guess a password or PIN
- Where the authenticator is a shared secret, the Attacker could gain access to the CSP or Verifier and obtain the secret value
- An attacker may observe the entry of a PIN or passcode, find a written record or journal entry of a PIN or passcode, or may install malicious software (e.g. a keyboard logger) to capture the secret
- An attacker may determine the secret through off-line attacks on network traffic from an authentication attempt
- An attacker may be able to gain information about a Subscriber's Preregistered Knowledge researching the subscriber or through other social engineering techniques (e.g. the subscriber might refer to his/her pet in a conversation or blog)

Authenticator Threats

- Something you are (biometrics)
 - May be replicated
 - An Attacker may obtain a copy of the authenticator owner's fingerprint and construct a replica – assuming that the biometric system(s) employed to not block such attacks by employing robust liveness detection techniques

Biometrics – when employed as a single factor of authentication by themselves are not acceptable 1-factor secrets for e-authentication

Digital Identity Determination for your SSP

CSP Name | Information System Name

Introduction and Purpose

FEDRAMP SYSTEM SECURITY PLAN (SSP) LOW BASELINE TEMPLATE CSP Name | Information System Name

Version #.#, Date

4

FEDRAMP SYSTEM SECURITY PLAN (SSP) LOW BASELINE TEMPLATE

Version #.#, Date

Using this categorization, in conjunction with the risk assessment and any unique security requirements. we have established the security controls for this system, as detailed in this SSP.

2.3. Digital Identity Determination

The digital identity information may be found in Attachment 3. Digital Identity Worksheet.

Note: NIST SP 800-63-3, Digital Identity Guidelines, does not recognize the four Levels of Assurance model previously used by federal agencies and described in OMB M-04-04, instead requiring agencies to individually select levels content and the select level on being performed.

The digital identity level is Choose an item.

Additional digital identity bn 15 Attachments Di Choose an item. Selection. Level 1: AAL1, IAL1, FAL1

3. INFORMATI Level 2: AAL2, IAL2, FAL2 Čhoose an item.

Level 3: AAL3, IAL3, FAL3, functional proponent/advocate for this The following individual system.

Table 3-1. Information System Owner

Information System Owner Information				
Name	<enter name=""></enter>			
Title	nter Title>			
Company / Organization	<enter company="" organization="">.</enter>			
Address	<enter address,="" and="" city,="" state="" zip=""></enter>			
Phone Number	<555-555-5555>			
Email Address	<enter address="" email=""></enter>			

4. AUTHORIZING OFFICIAL

Instruction: The Authorizing Official is determined by the path that the CSP is using to obtain an authorization.

JAB P-ATO: FedRAMP, JAB, as comprised of member representatives from the General Services Administration (GSA), Department of Defense (DoD) and Department of Homeland Security (DHS)

Agency Authority to Operate (ATO): Agency Authorizing Official name, title and contact information

Delete this and all other instructions from your final version of this document

DIGITAL IDENTITY WORKSHEET ATTACHMENT 3

This Attachment Section has been revised to include the Digital Identity template. Therefore, a separate attachment is not needed. Delete this note and all other instructions from your final version of this document.

The Digital Identity section explains the objective for sele the candidate system. Guidance on selecting the system in NIST SP 800-63, Revision 3, Digital Identity Guidelines.

This document provides guidance on digital identity serv

FEDRAMP SYSTEM SECURITY PLAN (SSP) LOW BASELINE TEMPLATE CSP Name Information System Name

Version #.#. Date

FedRAMP maps its system categorization levels to NIST 800-63-3's levels as shown in Table 15-3:

establishing confidence in user identities electronically p Authentication focuses on the identity proofing process (assertion protocol used in a federated environment to cc information (if applicable) (FAL). NIST SP 800-63-3, Digita four Level of Assurance model previously used by federa instead requiring agencies to individually select levels co		Table 15-3. Mapping FedRAMP Levels to NI		ng FedRAMP Levels to NI	FEDRAMP SYSTEM SECURITY PLAN (SSP) LOW BASELINE TEMPLATE CSP Name Information System Name			Version #.#, Date
		FedRAMP System Categorization	Identity Assurance Level (IAL)	Authenticator Assurance Lev (AAL)	Table 15-4. Potential Impacts for Assurance Levels			
NIST SP 800-63-3 can be found at the fo	ollowing URL: NIS	High	IAL3: In-person, or	AAL3: Multi-factor	Assurance Level Impa		ct Profile	
			supervised remote	upervised remote required based on	Potential Impact Categories	1	2	3
Information System Name/Title This Digital Identity Plan provides an overview of the sec Name (Enter Information System Abbreviation) in accord			cryptographi authenticato	hardware-based cryptographic	Inconvenience, distress or damage to standing or reputation	Low	Mod	High
				authenticator and approved cryptograp	Financial loss or agency liability	Low	Mod	High
			techniques	Harm to agency programs or public interests	N/A	Low/Mod	High	
Table 15-2. Information Syste		Moderate	IAL2: In-person or remote, potentially	AAL2: Multi-factor required, using	Unauthorized release of sensitive information	N/A	Low/Mod	High
Unique Identifier I	nformation Syste		involving a "trusted	approved cryptograp techniques	Personal Safety	N/A	Low	Mod/High
	ormation System Nar	Low	IAL1: Self-asserted	AAL1: Single-factor o	Civil or criminal violations	N/A	Low/Mod	High
Enter FedRAMP Application Number.	ormation system Nar			multi-factor				_
		FedRAMP Tailored LI-SaaS	IAL1: Self-asserted	AAL1: Single-factor o multi-factor	Digital Identity Level Selection			

Digital Identity Level Definitions

NIST SP 800-63-3 defines three levels in each of the com federal information system's Digital Identity posture. NIS as:

- IAL refers to the identity proofing process.
- AAL refers to the authentication process.
- FAL refers to the strength of an assertion in a feature authentication and attribute information (if appl

FedRAMP 01000110010001010100001000100010000000

right system authentication technology solution for the select selecting the system authentication technology solution is avi Delete this instruction from your final version of this document.

Selecting the appropriate Digital Identity level for a system en Instruction: Select the lowest level that will cover all potential impact identified from Table 15-4. Potential Impacts for Assurance Levels.

Review Maximum Potential Impact Levels

CSP Name has assessed the potential risk from Digital Identity

to a user's asserted identity. CSP Name has taken into consid the likelihood of the occurrence of the harm and has identifie Potential Impacts for Assurance Levels.

Assurance is defined as 1) the degree of confidence in the vet of the individual to whom the credential was issued, and 2) th who uses the credential is the individual to whom the credent

The CSP Name has identified that they support the Digital Identity Level that has been selected for the			
Information System Name as noted in Table 15-5. Digital Identity Level. The selected Digital Identity			
Level indicated is supported for federal agency consumers of the cloud service offering. Implementation			
details of the Digital Identity mechanisms are provided in the System Security Plan under control IA-2.			

Table 15-5. Digital Identity Level

Digital Identity Level	Maximum Impact Profile	Selection
Level 1: AAL1, IAL1, FAL1	Low	
Level 2: AAL2, IAL2, FAL2	Moderate	
Level 3: AAL3, IAL3, FAL3	High	

MIS5214 Security Architecture



✓ New schedule for today's classes and mid-term exam

✓ Access Control

✓ Identification and Authentication

✓ Digital Identity Guidelines


- Biometrics (quick overview/review)
- Centralized Remote Access Control Technologies

Authentication – Biometrics

Two different categories of biometric factor authentication:

- 1. Physiological ("what you are")
 - Physical attribute unique to a specific individual
 - Less prone to change unless a disfiguring accident
 - Hard to impersonate
- 2. Behavioral ("what you do")
 - A characteristic of an individual
 - Can change over time
 - Can be forged



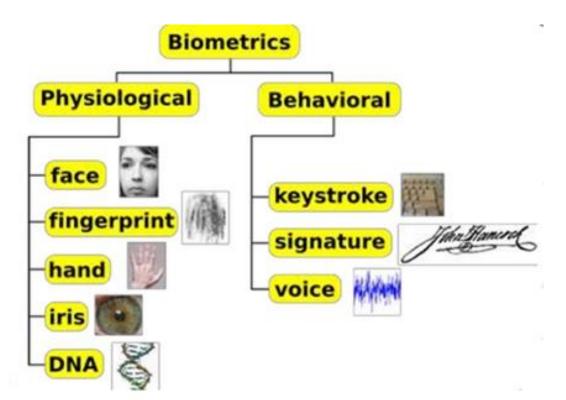

Authentication – Biometrics


During identity verification (i.e. authentication) the biometric system scans personal's physiological attribute or behavioral trait and compares the captured data to a record created in an earlier enrollment process

Biometric system

- Must be capable of repeatedly taking accurate measurements of anatomical or behavioral characteristics
- Error types:
 - False negative incorrect rejection of the identity of authorized individual
 - Called a Type I error
 - False Rejection Rate (FRR) is a measurement of the likelihood that biometric device will result in Type I errors
 - False positive incorrect match and identity acceptance of unauthorized individual ("imposter")
 - Called a Type II error
 - False Acceptance Rate (FAR) is a measurement of the likelihood that biometric device will result in Type II errors



 Organizations prioritizing confidentiality would accept a certain rate of Type I errors to achieve no Type II errors Calibration of biometric systems would enable lowering Type II error rate by adjusting system sensitivity which will increase Type I error rate

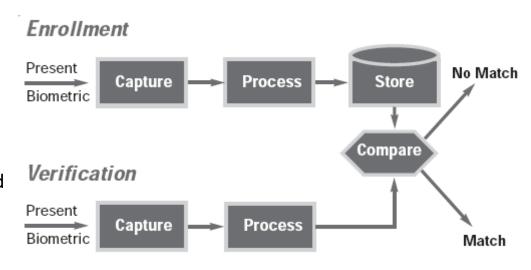

Authentication – Biometrics


Crossover error rate (CER) also called Equal error rate (EER)

- Objective measurement of biometric system accuracy, useful for comparing different biometric system products
- Is a rating, stated as a percentage
- CER is the point at which false rejection rate equals the false acceptance rate: FRR = FAR
- Most important metric in determining a biometric system's accuracy!

Scanning fingerprint from display



Experts' advice: Aside from updating software, all involve authentication

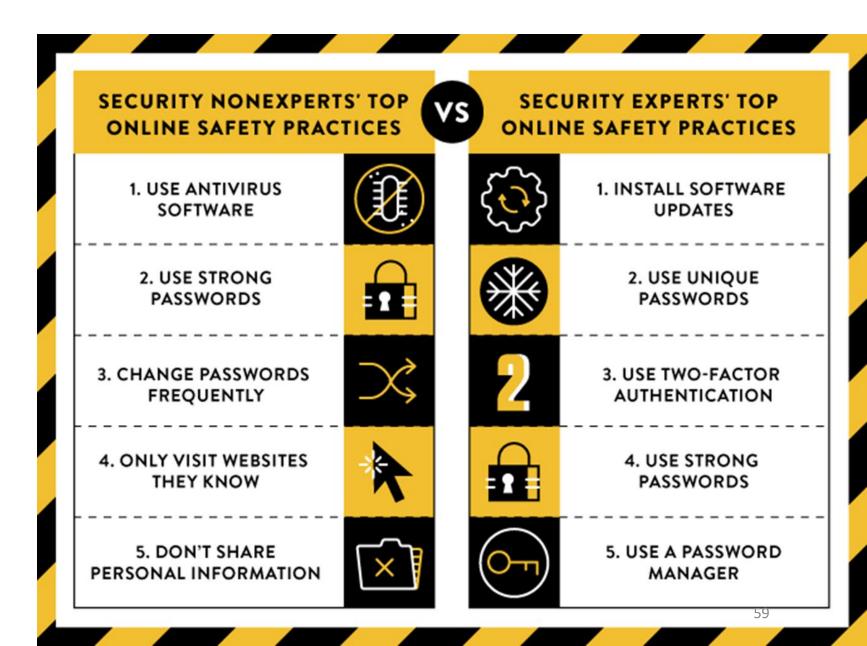



✓ New schedule for today's classes and mid-term exam

✓ Access Control

✓ Identification and Authentication
 ✓ Digital Identity Guidelines
 ✓ Biometrics (quick overview/review)

Centralized Remote Access Control Technologies

Centralized Remote Access Control Technologies


Use what is referred to as "AAA Protocol" (triple A)

- Authentication, Authorization, and Auditing (or Accounting)
 - Early traditional AAA Protocols include (*more on these and their improvements later...*):
 - Password Authentication Protocol (PAP)
 - Challenge Handshake Authentication Protocol (CHAP)
 - Extensible Authentication Protocol (EAP)
- RADIUS Remote Authentication Dial-In User Service (RADIUS)
- TACACS Terminal Access Controller Access Control System (TACACS) TACACS+
- Diameter Is <u>not</u> an acronym

RADIUS - Remote Authentication Dial-In User Service

Network protocol providing:

- Client/server authentication, authorization and audits of remote users
- Single administered entry point, with standardized security and simple way to track usage and network statistics
- Runs in the application layer, and can use either TCP or UDP as transport
- Created by Livingston Enterprises then published as a set of open protocol standards (RFC 2865 and RFC 2866)
- Today:
 - Most Internet Service Providers (ISPs) use RADIUS to authenticate their customers before they are provided access to the Internet
 - Many corporations use RADIUS to provide remote and home user employees to access their network resources

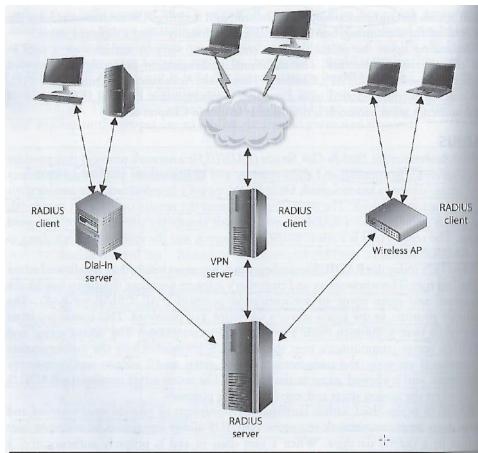

Environments can implement different RADIUS infrastructures.

RADIUS - Remote Authentication Dial-In User Service

- The access server and user's software negotiate a handshake procedure and agree on an authentication protocol (PAP, CHAP, or EAP)
 - User provides username and password to the access server via a Point-to-Point protocol (PPP) connection
 - Access server and RADIUS server communicate over the RADIUS protocol
- Once the authentication is properly completed
 - User system is given an IP address and connection parameters, and corporate users are provided a preconfigured profile to control which resources they can access
- User credentials and configurations can be held in LDAP (Lightweight Directory Access Protocol) servers, databases or text files
- Network access servers, the gateways that control access to a network, usually contain a RADIUS client component that communicates with the RADIUS server


RADIUS - Remote Authentication Dial-In User Service

- Uses UDP (connectionless)
 - Requires RADIUS to have more code to detect and correct transmission errors (packet corruption, long timeouts, or dropped packets)
- Encrypts users' password only when transmitted from RADIUS client to RADIUS server
 - Other information is passed in clear text: Username, accounting and authorized services
 - Open invitation for attackers to capture session information for replay attacks
 - Vendors who integrated RADIUS into their products must understand the weaknesses and add additional security capabilities into their products
- Combined authentication and authorization functionality limits flexibility...

TACACS – Terminal Access Controller Access Control System

3 generations

- 1. TACACS
 - Combines authentication and authorization processes
 - Uses fixed passwords for authentication
- 2. XTACACS (Extended TACACS)
 - Separates authentication, authorization and auditing processes
- 3. TACACS+
 - Is a different protocol than TACACS and XTACACS

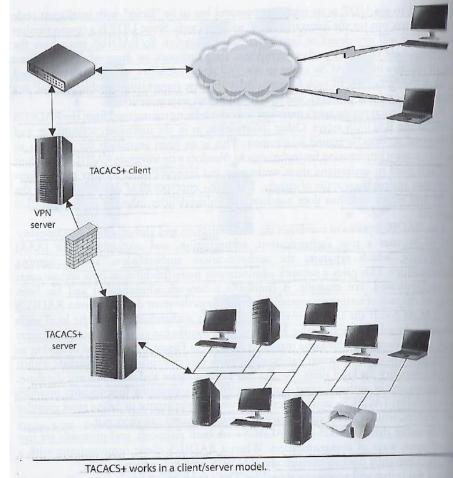

TACACS+

- Has 2-factor authentication
 - Allows users to one-time (dynamic) passwords for more protection
- Similar functionality as RADIUS but uses TCP
 - Does not need extra code to deal with transmission problems like RADIUS which supports UDP
- Encrypts all data between client and server
 - Does not have the vulnerabilities inherent in RADIUS
- Users true authentication, authorization and accounting/audit (AAA) architecture that separates the 3 functions to provide network administrators more flexibility in how remote users are authenticated
 - Can work with alternative authentication servers (e.g. Kerberos is used in the organization for authentication then it can be used by TACACS+, alternatively if Active Directory is used for local users then that can be used)
 - Can define more granular user privledges to control over the specific commands users can carry out
- Is a protocol with more Attribute Value Pairs (AVPs) than RADIUS
 - Enabling network administrators to use them to define ACLs filters, user privileges and more...

RADUS versus TACACS+

	RADIUS	TACACS+
Packet delivery	UDP	ТСР
Packet encryption	Encrypts only the password from the RADIUS client to the server.	Encrypts all traffic between the client and server.
AAA support	Combines authentication and authorization services.	Uses the AAA architecture, separating authentication, authorization, and auditing
Multiprotocol support	Works over PPP connections.	Supports other protocols, such as AppleTalk, NetBIOS, and IPX.
Responses	Uses single-challenge response when authenticating a user, which is used for all AAA activities.	Uses multiple-challenge response for each of the AAA processes. Each AAA activity must be authenticated.

Specific Differences Between These Two AAA Protocols

TACACS+ is a better choice for corporate networks needing better authentication and control of authorization


Diameter – "twice the radius"

- Enhanced AAA protocol providing similar functionality as RADIUS and TACACS+, but with greater flexibility and capabilities
- Consists of 2 portions:
 - Base protocol secure communication among Diameter entities, feature discovery and version negotiation
 - Extensions allowing various technologies to use Diameter authentication, authorization and auditing capabilities
 - Supports interoperability with wireless devices, smartphones, Voice over IP (VOIP), Mobile IP (coordinates transfer or traffic between care-of-address and home IP address)
- Peer-based protocol
 - Not Client/Server (which requires client and server to take turns sending data between them)
 - Either end can initiate communication

MIS5214 Security Architecture

Diameter – "twice the radius"

- Authentication
 - PAP, CHAP, EAP
 - End-to-end protection of authentication information
 - Replay attack protection
- Authorization
 - Redirects, secure proxies, relays, and brokers
 - State reconciliation
 - Unsolicited disconnect
 - Reauthorization on demand
- Accounting/Auditing
 - Reporting, roaming operations (ROAMOPS) accounting, event monitoring

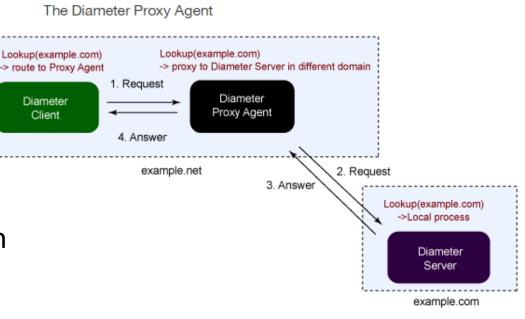

Diameter

Client

Diameter Versus RADIUS

	Diameter	RADIUS
Transportation Protocol	Connection-Oriented Protocols (TCP and SCTP)	Connectionless Protocol (UDP)
Security	Hop-to-Hop, End-to-End	Hop-to-Hop
Agent Support	Relay, Proxy, Redirect, Translation	Implicit support, which means the agent behaviors might be implemented in a RADIUS server
Capabilities Negotiation	Negotiate supported applications and security level	Don't support
Peer Discovery	Static configuration and dynamic lookup	Static configuration
Server Initiated Message	Supported. for example, re- authentication message, Session termination	Don't support
Maximum Attribute Data Size	16,777,215 octets	255 octets
Vendor- specific Support	Support both vendor-specific messages and attributes	Support vendor-specific attributes only

Liu, J., Kiang, S., and Lin, H. (2006) "Introduction to Diameter – Get the next generation AAA protocol", IBM developerWorks



✓Access Control

✓ Identification and Authentication

✓ Digital Identity Guidelines

✓ Biometrics (quick overview/review)

✓ Centralized Remote Access Control Technologies